



SECA BALL VALVE 1000 WOG 1-PC

Reduce Bore


Model: BV-1P

- Investment Castings for Body and Cap
- Threaded ends: ANSI B2.1, BS 21, DIN 259/2999
- Internal entry blow-out proof stem
- Pressure rating: 1000 PSI (PN63)
- Material: CF8M, CF8, CF3M, WCB
- Pressure test: API 598

- 1000PSI (PN63)
- ANSI B2.1, BS 21, DIN 259/2999
- CF8M, CF8, CF3M, WCB

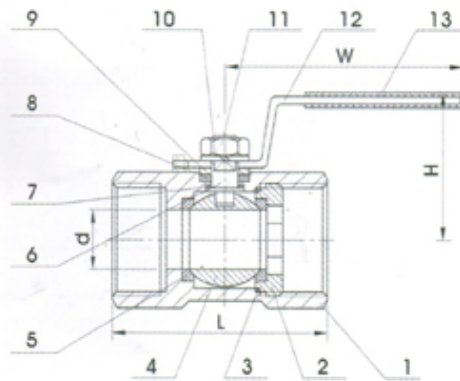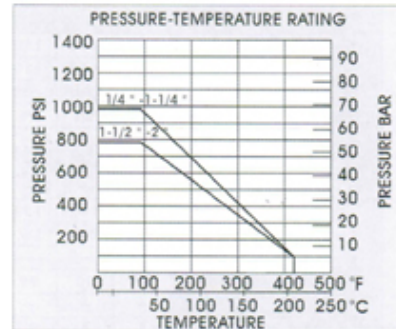

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M(1.4408)	1
2	Cap	CF8M(1.4408)	1
3	Body Gasket	PTFE	1
4	Ball	SS316	1
5	Ball Seat	R-PTFE(15%)	2
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	Stem Packing	PTFE	1
9	Washer	SS304	1
10	Spring Washer	SS304	1
11	Nut	SS304	1
12	Handle	SS304	1
13	Handle Cover	Plastic	1

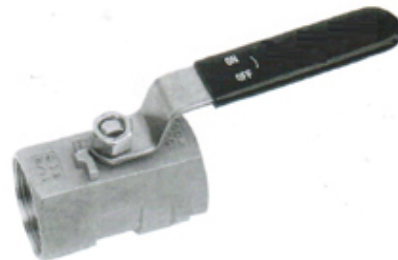



SIZE	d	L	H	W	TORQUE(N·m)	WEIGHT(Kgs)
1/4"	5	40	33	67	2	0.07
3/8"	7	45	36	67	2	0.10
1/2"	9	57	37	93	3	0.16
3/4"	12.5	60	42	93	3	0.25
1"	15	71	52	103	4	0.40
1-1/4"	20	78	56	103	5	0.65
1-1/2"	25	82	65	125	7	0.83
2"	32	100	70	125	9	1.30

SECA BALL VALVE 1000 WOG 2-PC

Full Bore Model:BV -2P

- Investment Castings for Body and Cap
- Threaded ends:ANSI B2.1,BS 21,DIN 259/2999
- Internal entry blow-out proof stem
- Pressure rating:1000 PSI(PN63)
- Material:CF8M,CF8,CF3M,WCB
- Pressure test: API 598

- 1000PSI (PN63)
- ANSI B2.1,BS 21,DIN 259/2999
- CF8M,CF8,CF3M,WCB

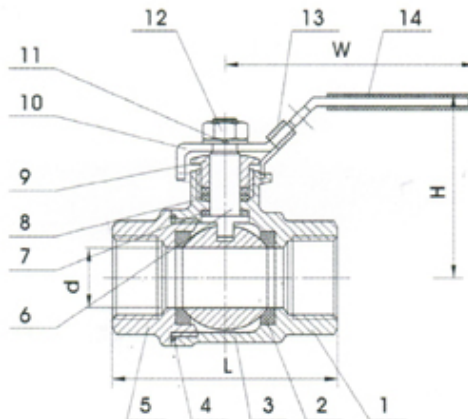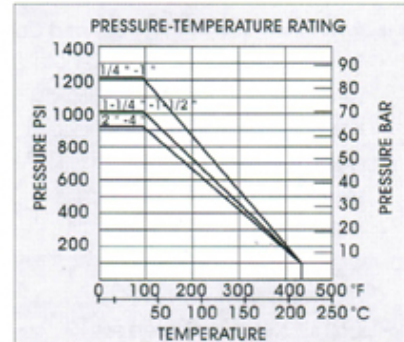

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M(1.4408)	1
2	Ball Seat	R-PTFE(15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	1
5	Cap	CF8M(1.4408)	1
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	Stem Packing	PTFE	1
9	Gland Nut	SS304	1
10	Handle	SS304	1
11	Spring Washer	SS304	1
12	Nut	SS304	1
13	Lock Device	SS304	1
14	Handle Cover	Plastic	1



SIZE	d	L	H	W	TORQUE(N·m)	WEIGHT(Kgs)
1/4"	11.6	52	56	100	4	0.23
3/8"	12.5	52	56	100	4	0.22
1/2"	15	58	65	100	5	0.26
3/4"	20	67	68	115	8	0.47
1"	25	78	79	150	10	0.65
1-1/4"	32	90	84	150	14	1.15
1-1/2"	40	104	93	180	18	1.65
2"	50	127	99	180	25	2.75
2-1/2"	65	158	136	245	48	4.90
3"	76	175	146	245	75	7.70
4"	94	187	160	278	110	16.10


SECA BALL VALVE 1000 WOG 3-PC

Full Bore


Model: BV-3P

- Investment Castings for Body and Cap
- Threaded ends: ANSI B2.1, BS 21, DIN 259/2999
- Length According to DIN 3202-M3
- Internal entry blow-out proof stem
- Pressure rating: 1000 PSI (PN63)
- Material: CF8M, CF8, CF3M, WCB
- Pressure test: API 598

- 1000PSI (PN63)
- ANSI B2.1, BS 21, DIN 259/2999
- CF8M, CF8, CF3M, WCB

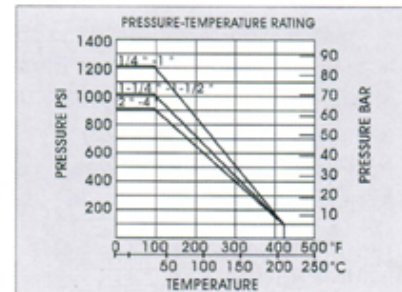

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M(1.4408)	1
2	Ball Seat	R-PTFE(15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	2
5	Cap	CF8M(1.4408)	2
6	Spring Washer	SS304	4(6)
7	Nut	SS304	4(6)
8	Bolt	SS304	4(6)
9	Stem	SS316	1
10	Thrust Washer	PTFE	1
11	Stem Packing	PTFE	1
12	Gland Nut	SS304	1
13	Handle	SS304	1
14	Spring Washer	SS304	1
15	Nut	SS304	1
16	Lock Device	SS304	1
17	Handle Cover	Plastic	1

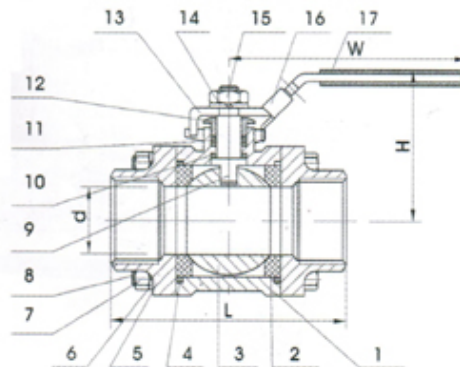

SIZE	d	L	H	W	TORQUE(N·m)	WEIGHT(Kgs)
1/4"	11	68	50	96	4	0.33
3/8"	12.7	68	50	96	4	0.32
1/2"	15	75	62	128	5	0.39
3/4"	20	85	57	130	8	0.76
1"	25	90	78	162	10	1.02
1-1/4"	32	112	88	162	14	1.73
1-1/2"	40	120	95	184	18	2.42
2"	50	145	102	184	25	3.42
2-1/2"	65	185	119	224	48	8.11
3"	80	210	130	224	75	12.10
4"	100	278	159	278	110	20.60