

SECA BALL VALVE FULL BORE 1020 600 WOG

MODEL: 200 GG

DIMENSION

Size	DN	D	L	H	E
1/2"	15	15	52	60	92
3/4"	20	19	62	63	106
1"	25	25	71	65	110
1-1/4"	32	32	84	78	115
1-1/2"	40	40	100	90	145
2"	50	50	119	101	145
2-1/2"	65	63	135	129	210
3"	80	75	150	137	210
4"	100	97	175	151	250



MATERIAL

No	Part	Material
1	Bonnet	Cast Iron
2	Body	Cast Iron
3	Ball	SS 304
4	Seat	PTFE
5	Gasket	PTFE
6	Gland Screw	Cast Iron
7	Stem	Brass
8	Nut	Cast Iron
9	Handle	Steel

Pressure :Max:40 BAR

Temperature :> 20 C <> 120 C

Threaded BSPT: ISO 0228/1

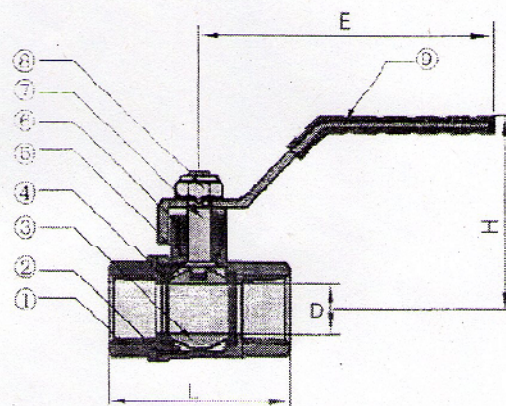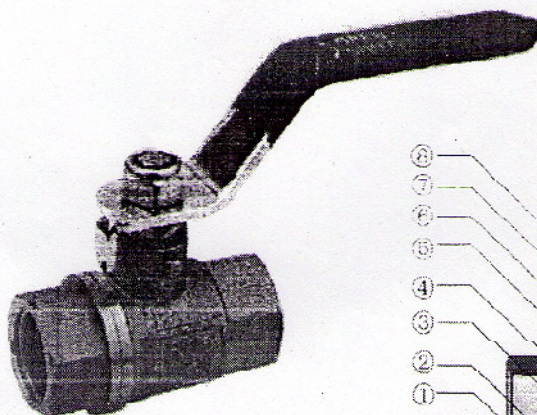

LL BALL VALVE FULL BORE 1019 400 WOG

MODEL: 1019

DIMENSION

Size	DN	D	L	H	E
1/4"	8	9	40.3	39.4	85
3/8"	10	9	40.3	39.4	85
1/2"	15	14.8	48.5	47.5	98
3/4"	20	19	54.6	51	98
1"	25	24	64	61	123
1-1/4"	32	30.2	76	72.5	142
1-1/2"	40	37	88	77.5	142
2"	50	47	99	86	165
2-1/2"	65	62	132	115.5	225
3"	80	74	152.4	124	225
4"	100	90	179	135.5	250

MATERIAL

No	Part	Material
1	Bonnet	Brass
2	Body	Brass
3	Ball	Brass
4	Seat	NBR
5	Gasket	PTFE
6	Gland Screw	Brass
7	Stem	Brass
8	Nut	Steel
9	Handle	Steel

Pressure:Max 25 BAR

Temperature:-30C <> 95 C

Threaded : ISO 0228/1

Opening / Closing

Test: 20000 Times